


DO NOT SCALE

iP Lite PDU Overall power & environmental monitoring.

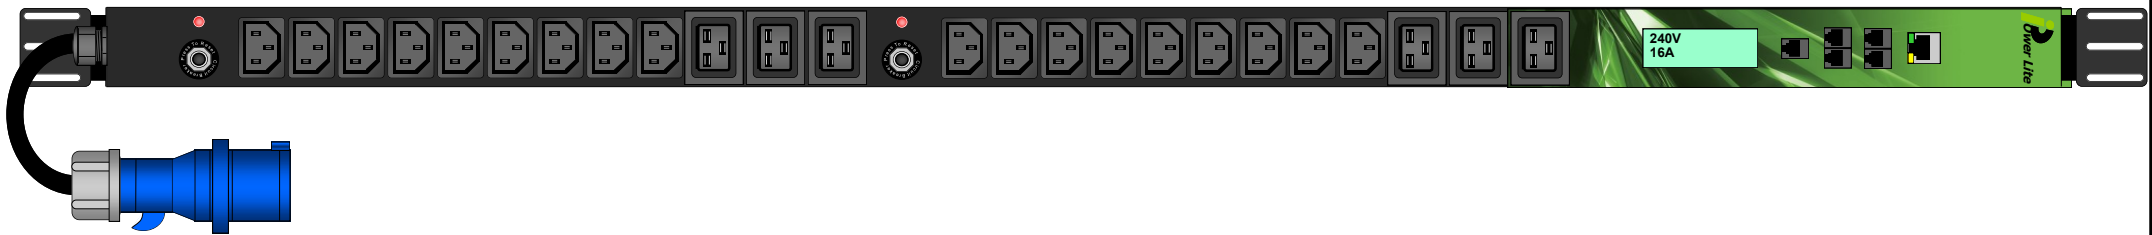

**Body Dimensions:** 45mm wide x 56mm deep x 1206mm o/a  
**Fixing Centres:** 1996mm  
**Material:** Mild Steel  
**Finish:** Black powder coat  
**Fixing Method:** End Brackets  
**Protection:** None  
**Earthing:** M6 Earth stud to end  
**Rating:** 32A @ 240V AC 50/60Hz  
**Special Requirements:** Bottom Entry

**Input:** 3m of 3x4.0mm H07RN-F cable to 32A plug  
**Output:** 18x C13 6x C19  
**Protection:** 2x 16A thermal trip (Per 9 & 3 outlets)  
**Estimated weight:** 5.8kg  
**Standards:** Manufactured in accordance with BS EN 60950-1  
**WEEE:** Compliant  
**RoHS:** Compliant  
**CE:** Compliant  
**Max Op Temperature:** -10° to +50°C



Rev :-

AWW

IPL-326B-IP1-3C-SP1

© 2021 This drawing and the works depicted are the copyright of IPT Limited and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.

22/03/21