

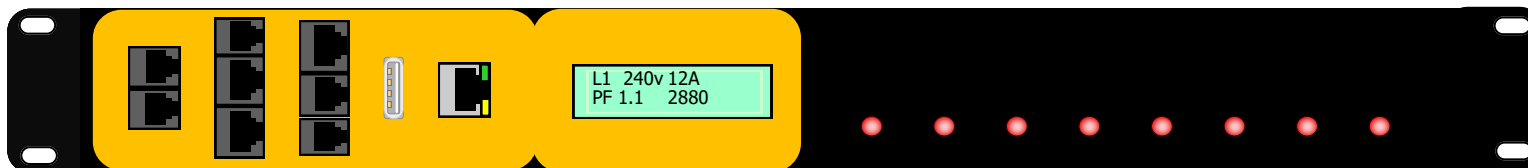


Front

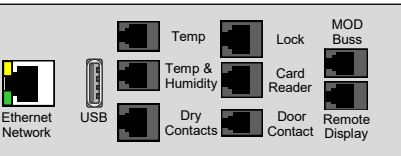

Rear

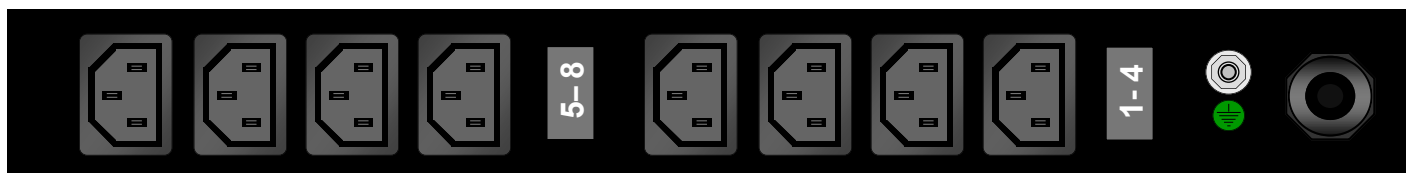

**Energy metrics including:**

- Volts
- Watts
- Amps
- Power factor
- kWh
- Frequency
- VA
- kVA
- Peak Volts
- Peak Amps
- Internal Temp
- Kg/Co2
- KJ/H
- BTU/H

**Environmental & security metrics including:**

- Up to 8 Temperature sensors
- Single temp/humidity sensor
- 3 sets of dry contacts
- Cabinet door lock
- Card reader
- Door open sensor
- Remote display
- MOD BUS port
- USB port

**Communications & Protocols.**

\*See product data sheet for further details

- HTTP
- HTTPS
- HTML
- CGI
- TELNET
- SMTP
- SYSLOG,
- RADIUS,
- SNMP v2 v3
- IP v4 v6

**Electrical Rating.**

Please note, these calculations are based on an assumed steady voltage of 230V AC and a Power Factor of 0.9. Voltage fluctuations will affect the kVA & kW values. The only rating that is constant is Current (Amps) This PDU will handle a constant current draw up to 16A. The kVA & kW ratings and are for indication purposes only.

INPUT			OUTPUT				PDU TOTAL	
Type	RMS Volts	RMS Amps	Type	RMS Volts	RMS Amps	PF	kVA	kW
1 Phase	230V	16A	1 Phase	230V	16A	0.9	3.68	3.312

**Body Dimensions:**  
**Fixing Centres:**  
**Material:**  
**Finish:**  
**Fixing Method:**  
**Input:**  
**Output:**

1U Rack Mount x 210mm Deep  
 Sheet MS  
 Black powder coat  
 End Brackets  
 3mtr 3core 2.5mm HO7 cable to 16A Commando  
 8x IEC C13 (Type F)

**Protection:**  
**Indicator:**

Front display, individual outlet power present

**Earthing:**  
**Rating:**  
**Standards:**

M6 Earth stud to end  
 16A @ 230V AC 50/60 Hz  
 Conforms to BS EN60950-1:2005 2nd edition +AM1 & AM2  
 Conforms to BS EN62368-1:2014+All:2017

**UK CA:**  
**WEEE:**  
**RoHS:**  
**CE:**  
**Operating Temp:**  
**Warranty:**

Compliant  
 Compliant  
 Compliant  
 -10° to +55°C  
 5 years return to base



Manufactured by G4 MPS Ltd.



AWW