


**IPLite – Port Identification**

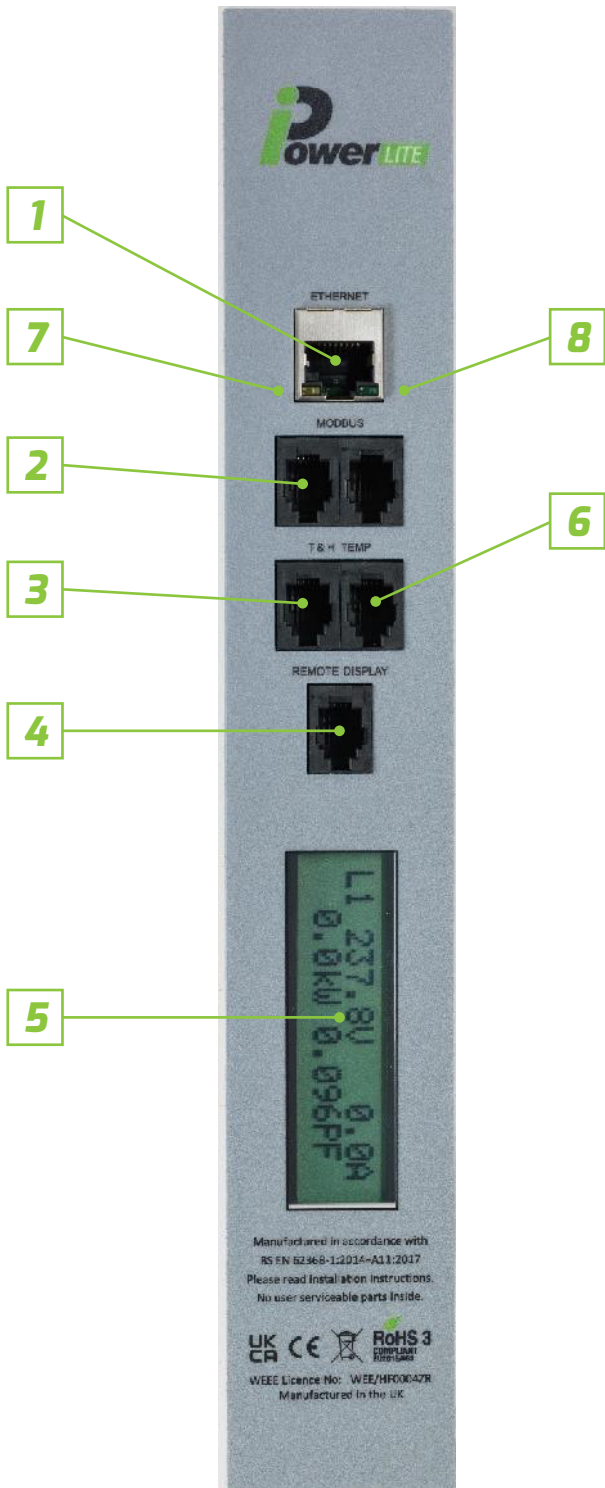

- 1 Ethernet Port** IEEE 802.3 with full 10/100Base-T network Compatibility.
- 2 Modbus Port** High Speed MODBUS RS485 port for local daisy chaining of up to 32 PDUs.
- 3 Temperature Sensor Port** connect up to 8 Daisy Chained Temperature Sensors
- 4 Remote Display Port** connect a secondary RGB Display for ease of viewing.
- 5 Local RGB Display** Backlit display shows energy metrics, Some Environmental Metrics, and current IP Address, the backlight can be configured to change colour in the event of an alarm condi on.
- 6 Humidity Sensor Port** Connect a Humidity / Temperature Sensor.
- 7 Reset Button** hidden beneath the label you will find a reset button, pressing this reboots the electronics (There is NO risk of power failure to connected equipment).
- 8 Default Button** hidden beneath the label you will find the default button, this enables a 'Factory Reset' (Please contact us for correct opera on).